


Name of the project:


REQUEST OF: PRICE REQUEST ORDER **To fax to the +33 3 88 79 84 85**


Quantity: Designation:
 Width: Length:

UPSTAND **TÔLE ACIER**
 Insulated No insulation RAL 9010 Galva thickness: 20/10° Other RAL


SIDEWALL UPSTAND

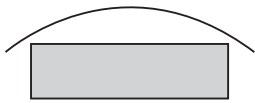1 
 Installation on a flat roof

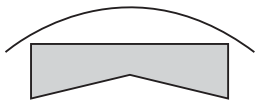
2 
 Slope (%):
 Installation on the ridge

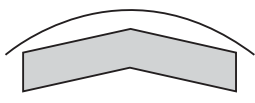3 
 Slope (%):
 Installation on the ridge of vault with large width

C = Width: mm
 L = Length: mm

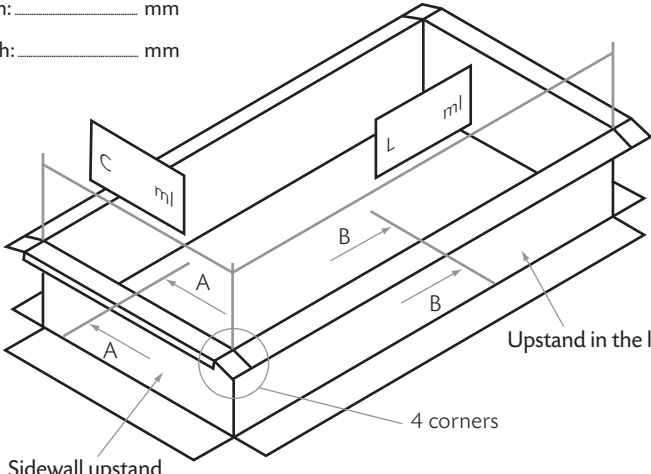


SIDEWALL UPSTAND
 h = 300 mm

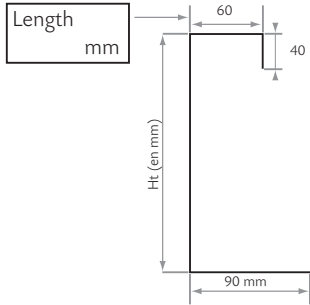

COUPE A-A
 Thickness of the insulation from 15 mm to 30 mm


Be careful concerning the dimension of the width, we have 2 solutions:

Upstand in the length 1 h = 300 mm

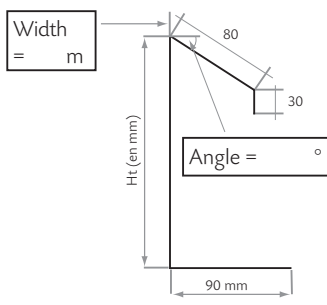


SECTION B-B
 Thickness of the insulation from 15 mm to 30 mm

Upstand in the length 2 h = 300 mm

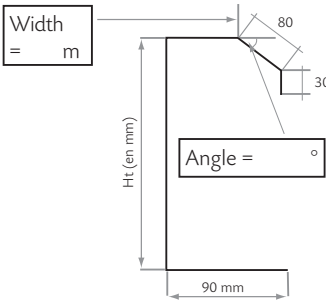

SECTION B-B
 Thickness of the insulation from 40 mm to 60 mm

We recommend you to install 1 bar every 3 m
 (please refer you to the drawing hereafter)

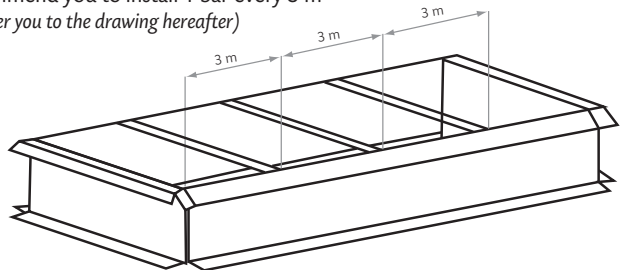


Remarks:

Name of the project:

REQUEST OF <input type="checkbox"/> PRICE REQUEST <input type="checkbox"/> ORDER		To fax to the 0033 3 88 79 84 85	
Name of the project :		Designation :	
Quantity :		Price :	
HEXAVOUTE Fix			
Quantity:		Width: m	Length: m
ALUMINIUM FRAMEWORK		WALLSIDE	
<input type="checkbox"/> Mill finish <input type="checkbox"/> Painted in RAL:		<input type="checkbox"/> Two <input type="checkbox"/> Without (adaptation on an existing wall) <input type="checkbox"/> One	
FILLING			
PCA	Thickness: <input type="checkbox"/> 10 mm 4 skins <input type="checkbox"/> 16 mm 7 skins	Light transmission: <input type="checkbox"/> Opal (standard) <input type="checkbox"/> Transparent <input type="checkbox"/> Opaque <input type="checkbox"/> Calor Control	
HEXAVOUTE DoP			
Quantity :		Width: m	Length: m
FILLING			
PCA	Thickness: <input type="checkbox"/> 10 mm 4 skins <input type="checkbox"/> 16 mm 7 skins	Light transmission: <input type="checkbox"/> Opal <input type="checkbox"/> Transparent <input type="checkbox"/> Calor Control <input type="checkbox"/> Opaque	
OPTIONS		ACCESSORIES	
<input type="checkbox"/> Anti-falling griddle <input type="checkbox"/> Daily ventilation		<input type="checkbox"/> Galvanized <input type="checkbox"/> Painted in RAL: <input type="checkbox"/> Electrical contactor <input type="checkbox"/> Thermofuse: <input type="checkbox"/> Standard (gauged to 93 °C) <input type="checkbox"/> In option: 140 °C	


SCHEMES

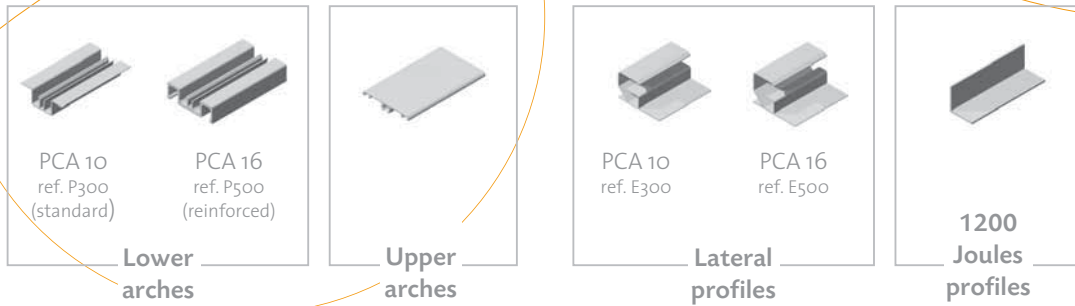

COMPONENTS

HEXAVOÛTE PCA Fix is consisting of:


- A self-supporting curved structure (superior and inferior arches) made of extruded aluminium. The arches are 1-metre spaced as standard but can be adapted to difficult climate conditions such as strong winds and heavy snowloads.
- Extruded aluminium bank profiles for:
 - The recovery of rain and condensation with evacuation on side.
 - The fastening of the arches.
 - The support of the lowest part of the filling and the tension of the arches.
- Stainless steel screws and bolts.
- A filling in alveolar polycarbonate (PCA).
- Pre-assembled sidewalls.

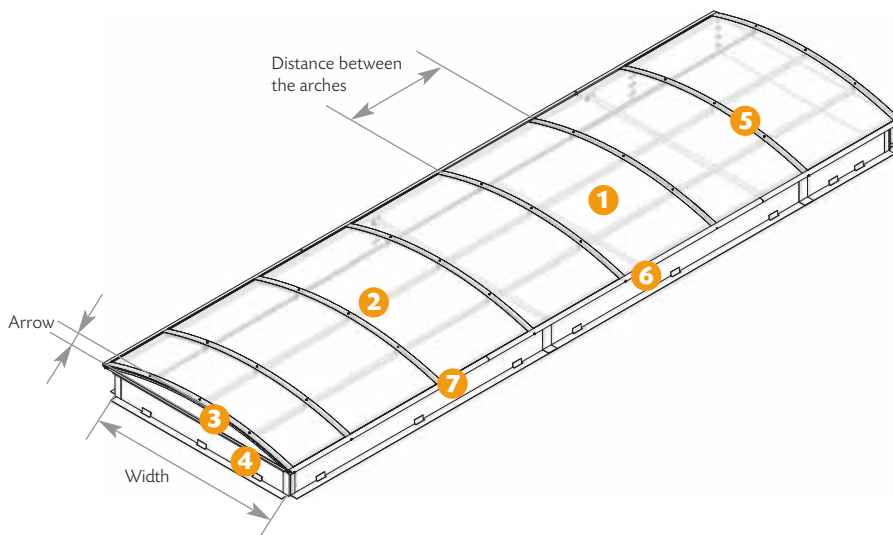


- 1 Filling PCA
- 2 1200 Joules profiles
- 3 Sidewall
- 4 Sidewall upstand
- 5 Arches
- 6 Steel upstand in the length (or adaptation upstand)
- 7 Profile + cover strip

TYPES OF UPSTANDS

Insulated straight upstand in steel (2 mm thick)

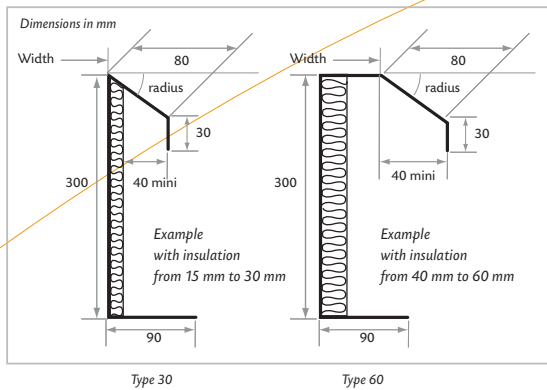


Sablere in steel (2 mm thick) for renovation

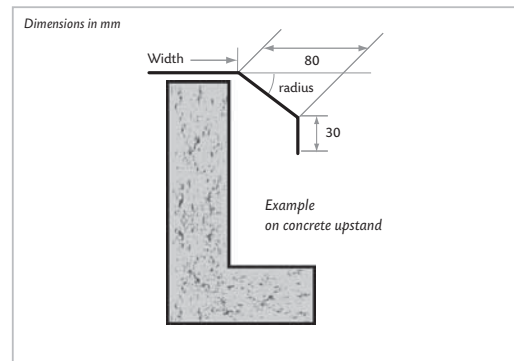


THE TIES

We recommend to install ties every 3 meters. These one are delivered with the upstands.
Contact us for more information.

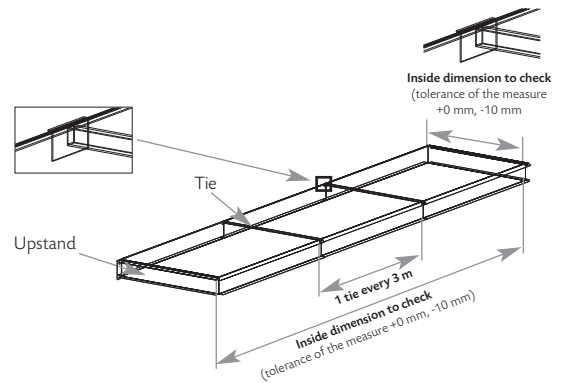


SIDEWALL UPSTAND

Our standard: Height of 300 mm with thermal insulation of 15 mm.



TYPES OF SIDEWALLS


The sidewall are pre-assembled in the factory.



Case n°1:

Existing support. Adaptation upstand provided by HEXADOME.

Please indicate at least 2 of the 3 dimensions on the drawing below.

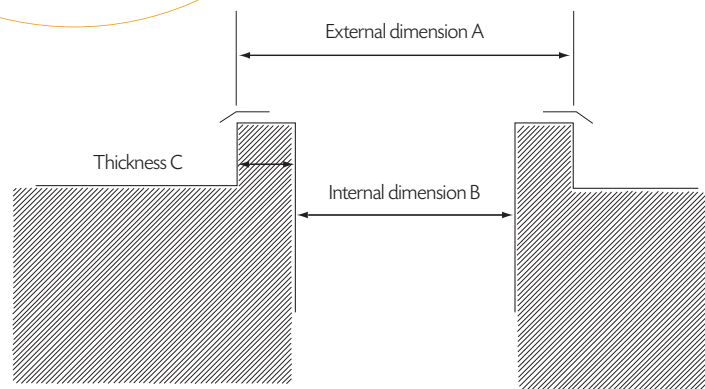

Case n°2:

Existing upstand. Adaptation upstand provided by HEXADOME.

