


# Hexacoif Air

Comfort range  
manual and electric

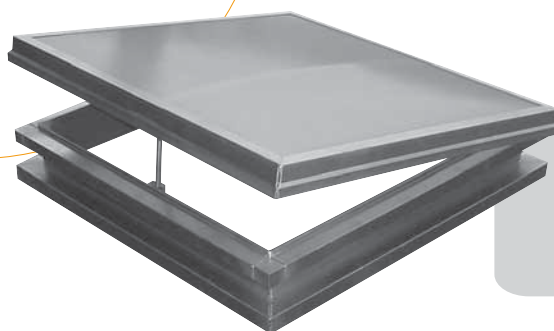

Hexacoif Air is a skylight designed for renovation and allows to carry out daily ventilation in the building. This product is available with manual or electrical activation.

Dimensions


Performances

References	Inner dimensions in cm	Lighting Surface (SLu) in m <sup>2</sup>
C 50	50 x 50	0,25
C 60	60 x 60	0,36
C 70	70 x 70	0,49
C 80	80 x 80	0,64
C 85	85 x 85	0,72
C 100	100 x 100	1,00
C 120	120 x 120	1,44
C 130	130 x 130	1,69
C 140	140 x 140	1,96
C 150	150 x 150	2,25
C 160	160 x 160	2,56
C 180	180 x 180	3,24
C 200	200 x 200	4,00
50 x 100	50 x 100	0,50
70 x 100	70 x 100	0,70
100 x 140	100 x 140	1,40
100 x 150	100 x 150	1,50
100 x 200	100 x 200	2,00
140 x 200	140 x 200	2,80


The hinges are mounted in the longest side of the skylight.

# Hexacoif

Comfort range **Air**  
manual and electric

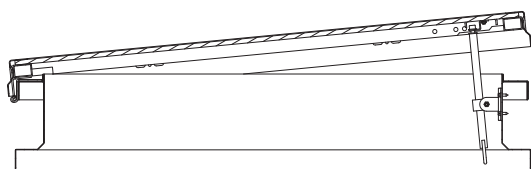

Hexacoif Air manual

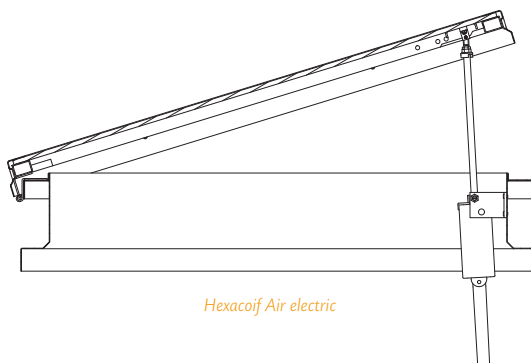

Hexacoif Air electric

#### COMPONENTS:

- A metallic upstand in galvanized steel of 150 mm high, which can be installed on all kind of existing support (concrete, steel, wood...).
- This product also allows to transform the original function of an existing skylight, while conserving the existing upstand.
- Hexacoif Air can be equipped in option with an insulated framework ( $U_f = 2.5W/m^2 K$ ).
- An aluminium frame which protects the periphery of dome or PCA.
- An opening mechanism:
  - Hexacoif Air Manual: a screw operated with the help of a crankshaft (250 mm stroke).
  - Hexacoif Air Electric: with an electric drive 230V, 50Hz, 150W, 0.7A, 300 mm stroke (switch in option).

#### FILLING:

- Our standard:
  - PCA 10 mm 4 skins
- In option:
  - PCA 16 mm 7 skins
  - Double dome in PMMA, polycarbonate or Hexachoc 1200J
  - Insulated aluminium cover

*For additional details, see the rubric of the options.*